Reflections



Reflections



UltraPure



M. Drive



UltraLounge





Liquid FX



Accent Ring Jets



NeckFlex Jet System

Retail price : 13 495 €*

A sophisticated spa There's new contoured seating all around, and amazing hydrotherapy. The new UltraLounge, NeckFLex Jet Pillow and the new deeper foot well with improved Typhoon Jets make this a remarkable hot tub.



Dimensions (cm) / Capacity 213 x 213 x 91 cm H / 1100 I

Seating Capacity 6 Adults

Weight Wet: 1400 kg / Dry: 300 kg

Features 2 NeckFlex Jet Pillows

UltraLounge
2 Single Speed Pumps

MoDrive Control
37 Jets
1 Circulation Pump

UltraPure Water Management System

Liquid FX in option







General	
Shape	Square
Seating Capacity	5+
Shell Material	Ultralife™ / Granitex™ / Geloy®
Dimensions	213 cm X 213 cm x 91 cm H
Corner Radii	41 cm
Water Capacity	1 100 Liters
Dry Weight	300 kg
Shipping Weight	320 kg
Full Weight	1 400 kg
Skirt Material	Wood or Synthetic


Water System	
Water Treatment System	UltraPure®
Plumbing Systems	3
Filters/Coverage	2 x 7 m2
Gate Valves	4
VCR Jet® - Air Adjustable/Directional	6
VCR Jet® - Rotator	4
VCR Jet® - Dual Rotator	4 Harrist Harr
VCR Jet® - Multi Port Spinner	2
VCR Jet® - Mini Rotator	2
VCR Jet® - Mini Directional	4 The Control of the
VCR Jet® - Euro Directional	4 (1) (1) (2) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4
VCR Jet® - Euro Rotator	2 / 11 / 12 / 12 / 12 / 12 / 12 / 12 /
VCR Jet® - Mini Directional in NFJ	
Typhoon Jet	
Ozone Jet	15 cracket - Control Line 16
Heater Return Jet	
Pump Returns	4 (////////////////////////////////////
Diverter Valves	
Floor Drains	1
Skimmer	20,3 cm Weir

Pump Information	50Hz
Motor Size – Peak HP	2.0 HP
Jet Pumps # of Pumps/ Speed	Two / single
Circulation pump	1
Fountain pump	n/a

Electrical System	50Hz
Voltage	230
Amperage	1X16 / 2X16 / 1X32
Heater	FastFlo 2.9 kW
Thermostat	Electronic
Light	Multi color LED
Control System	MSPA-MP-CE-D17-N/LFX
Upper Control (programable)	M-Drive with Scrolling Message Center
Auxiliary Upper Control	Yes





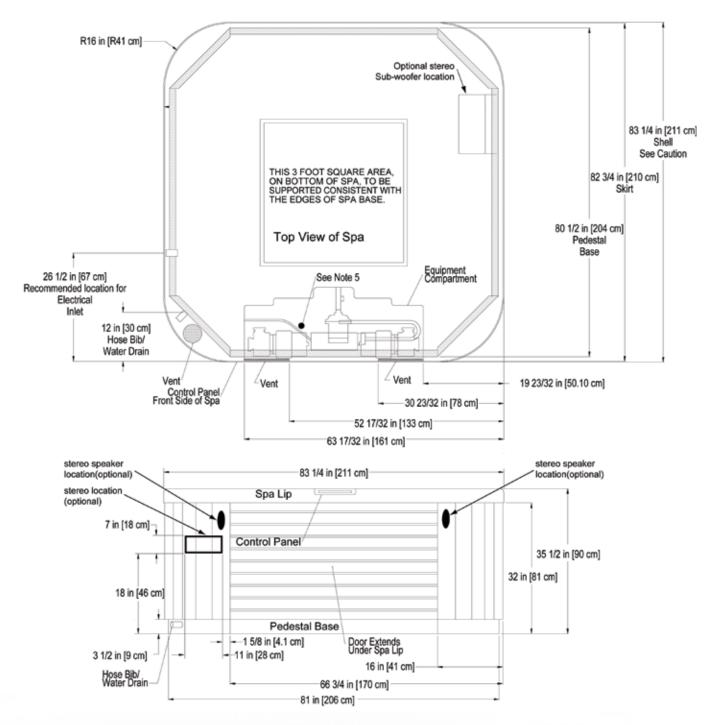

Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

- 1. Subject to change without notice.
- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.72cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details

Dimensions shown as inches and (centimeters) -XX" (cm)